


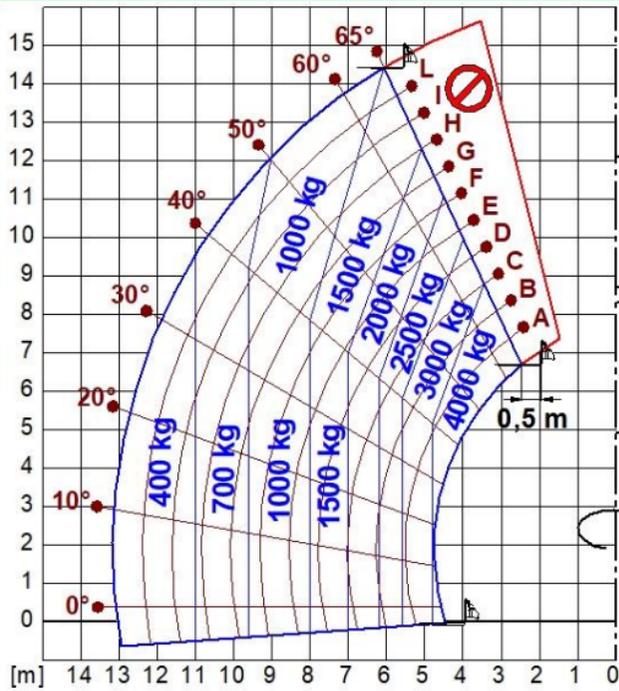
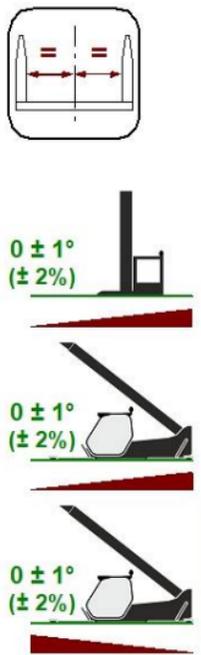
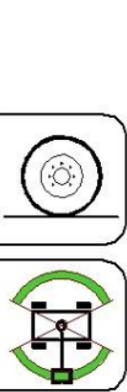
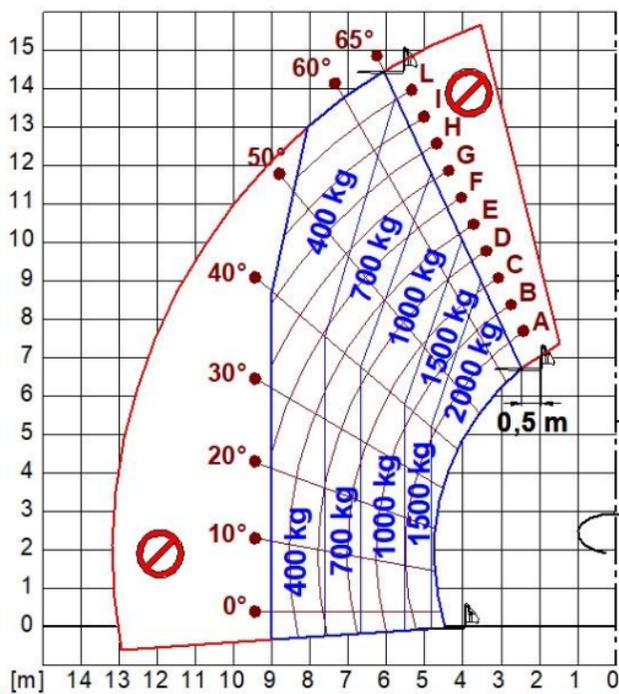


MERLO ROTO40.16



A0311 A0304	
A0200+A0500 A0201+A0500 A0210+A0500 A0211+A0500	-200 kg
A0100+A0304 A0100+A0311	-150 kg
A0271 A0291 A0292	
A0293 A0294	-100 kg MAX 1500 kg

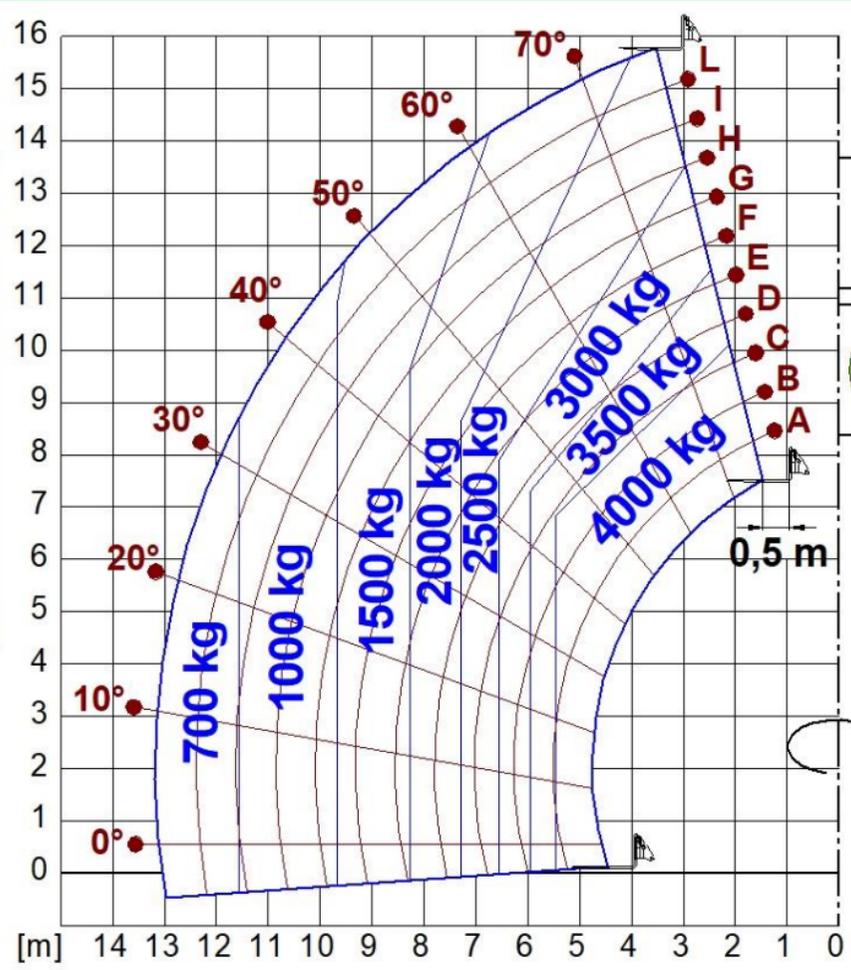

< 3 km/h
 0° ± 10°
 MAX 300 mm
 MAX 5° (9%)
 MAX 5° (9%)
 MAX 18° (35%)

R1

 MAX 12,5 m/s

ISO 22915-24 / EN 1459-2